



2011-2013 Grand Cherokee

Removal - Rear spoiler

1. Open the liftgate.
2. Locate the four mounting screws (4) for the spoiler, through the glass and remove.
3. Remove the hinge nuts (5).

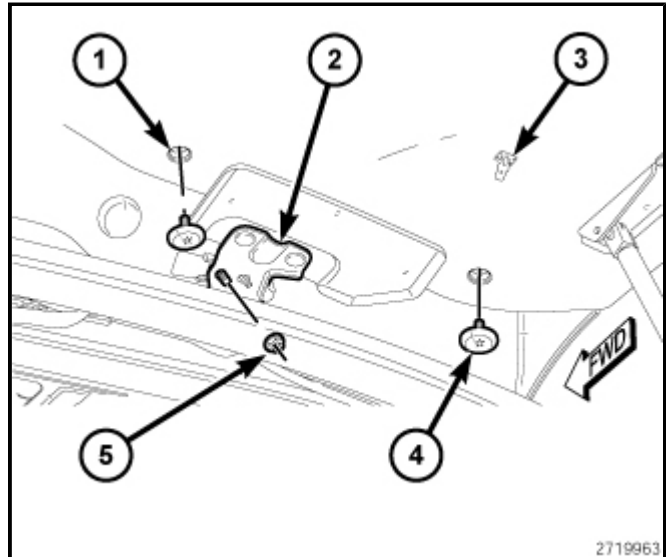

4. Remove the header trim (3).
5. Disconnect the electrical connector to the courtesy light (2).
6. Disconnect the washer solvent supply hose and the electrical connector.

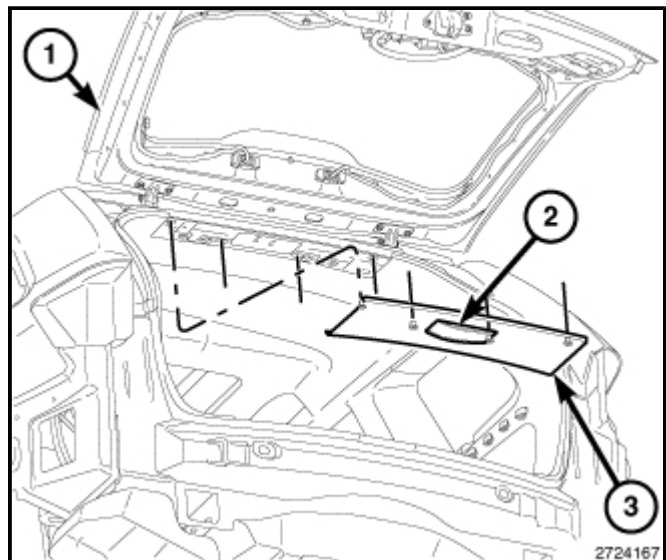

7. Lower the liftgate.
8. Pivot the spoiler (1) towards the front of the vehicle.
9. Remove the washer solvent grommet (4).
10. Remove spoiler from vehicle.

